

eMetal 0.8m – for Buildings & BIPV




Description

The eMetal is a semi-flexible and lightweight solar panel designed for installation on roof structures with limited load bearing capacity, aesthetical metal BIPV facades and many more demanding solar applications.

Features

- Most elegant and aesthetic solar module, beautiful uniform design
- High energy yield due to excellent shadow tolerance and temperature stability
- Easy installation – drill & fix –mounting instruction available on request
- Applicable for roofs and facades – semi-bendable
- Ultra-low weight, < 4 kg/m²
- Unbreakable & robust - no glass, no micro cracks
- EL tested
- Made in Switzerland
- Available in 0.8m, 1.6m, 2.3m and 3m length
- Available with black frame color for highest aesthetics

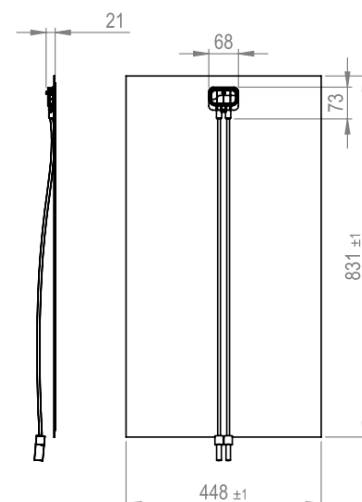

Dimensions			
Length		[mm]	831
Width		[mm]	448
Thickness at module		[mm]	2.2
Thickness at J-Box		[mm]	21 ± 1
Weight		[Kg]	1.6

Electrical characteristics at STC ¹				SF 25	SF 30
Model number					
Nominal power	Pmpp	[W]	25	30	
Tolerance		[W]	-0/+5	-0/+5	
Voltage at nom. power	Vmpp	[V]	34	34	
Current at nom. power	Impp	[A]	0.74	0.88	
Open circuit voltage	Voc	[V]	46	46	
Short circuit current	Isc	[A]	0.82	0.97	
Max. system voltage	IEC	[V]		1000	
Max. serial fuse rating		[A]		10	

Thermal characteristics			
Temperature coefficient	Voc	[%/°C]	-0.3
Temperature coefficient	Isc	[%/°C]	0.01
Temperature coefficient	Pmpp	[%/°C]	-0.35

Operating conditions			
Temperature range		[°C]	-40 to +85
Max. mechanical load			2400 Pa, 245 kg/m ²

Additional data	
Cell type	Flexible CIGS
Junction box	Back side including bypass diode, IP67, MC4 type / MC4 connectors, 700mm long cable (4mm ²)
Encapsulation	Fluoropolymer front sheet / 1mm alu back plate
Parallel connection	Y-connector available
Customization	Possible on request for larger volumes / Optional front and back-side junction box

Warranty & certification	
Performance guarantee	10 years on 90% of Pmpp under STC ¹ & 20 year on 80% of Pmpp under STC ¹
Warranty	5 years' workmanship after delivery date
Certification	EN IEC 61646; EN IEC 61730-1 & -2
Safety class	II

Notes

¹ STC: 1000 W/m², AM1.5G, 25°C, stabilized module state

² Not covered under current certifications

We continuously develop our products. Electrical and physical properties subject to change without prior notice.